

Dichtringe

Art.-Nr. 258.00 bis Art.-Nr. 258.04/2


P 7-111

aus Vulkanfiber

Temperaturbereich: max. +75 °C



258.04/1

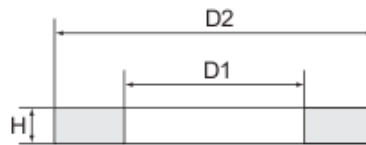

Dichtringe aus Vulkanfiber

Art.-Nr.	für Gewinde	D1 mm	D2 mm	H mm	Toleranzen mm
258.00	M 5	5,1	8,0	1,0	± 0,1
258.01	G 1/8	10,0	13,0	1,5	± 0,15
258.02	G 1/4	13,2	18,0	1,5	± 0,15
258.03	G 3/8	16,8	22,0	1,5	± 0,15
258.04	G 1/2	21,0	28,0	2,0	± 0,2
258.04/1	G 3/4	26,5	33,0	2,0	± 0,2
258.04/2	G 1	33,3	38,9	2,0	± 0,2