


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 – 10,0 bar
 Temperaturbereich: -10 °C bis +60 °C



13/14

Einfach-Ringstutzen

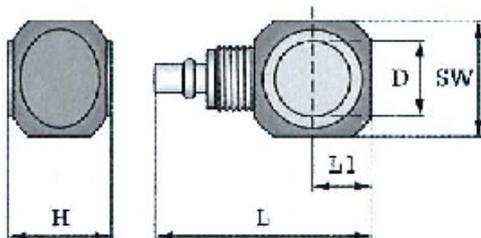

| Art.-Nr. | Gewinde | für Schlauch | NW mm | SW | D | L | L ₁ | H |
|----------|---------|--------------|-------|----|------|------|----------------|------|
| 13/11 | G 1/8 | 6/4 | 3 | 16 | 10,0 | 31,0 | 8,0 | 16,5 |
| 13/12 | G 1/8 | 8/6 | 5 | 16 | 10,0 | 33,0 | 8,0 | 16,5 |
| 13/14 | G 1/4 | 6/4 | 3 | 20 | 13,0 | 35,0 | 10,0 | 16,5 |
| 13/15 | G 1/4 | 8/6 | 5 | 20 | 13,0 | 36,5 | 10,0 | 16,5 |